

P120E "C"

Modular electric oven for bakery

COMPOSITION WITH 2 BAKING CHAMBERS
INTERNAL HEIGHT 30cm (12")



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- Leavening prover on wheels, height 800mm (31 1/2")
- Leavening prover on wheels and humidifier, height 800mm (31 1/2")
- Support with wheels, height 600mm (23 1/2")
- Support with wheels, height 800mm (31 1/2")
- Additional tray holder guides for compartment and support
- Steamer for baking chamber
- Refractory brick cooking surface
- Suction hood

(WITHOUT SURCHARGE)

- Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- Structure made in folded stainless steel
- Side panels in pre-painted sheet metal
- Stainless steel hood with aluminised steel top cover
- Front vapour collection hood in HT coating steel sheet
- Steam duct in stainless steel plate
- Stainless steel double door with bottom hinge and spring balance
- Tempered glass element
- Handles in thermoplastic material
- Control panel on front right hand side

INTERNAL CONSTRUCTION

- Cooking surface in buckle plate
- Aluminated steel top and side structure
- Rock wool heat insulation

FUNCTIONING

- Heated by armoured heating elements
- Electronic temperature management with independent adjustment of ceiling and floor
- Maximum temperatura reached 450°C (840°F)
- Continuous temperature monitoring with thermocouple
- Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- Lighting with halogen lamp
- Timer
- Economiser
- Independent maximum temperature safety device
- 20 customisable programs



MORETTI FORNI S.P.A.

www.morettiforni.com

info@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA


Tel. +39.0721.96161 - Fax +39.0721.9616299



P120E "C"

2 baking chambers height 30cm (12")

(assembled with support height 800mm (31 1/2"))

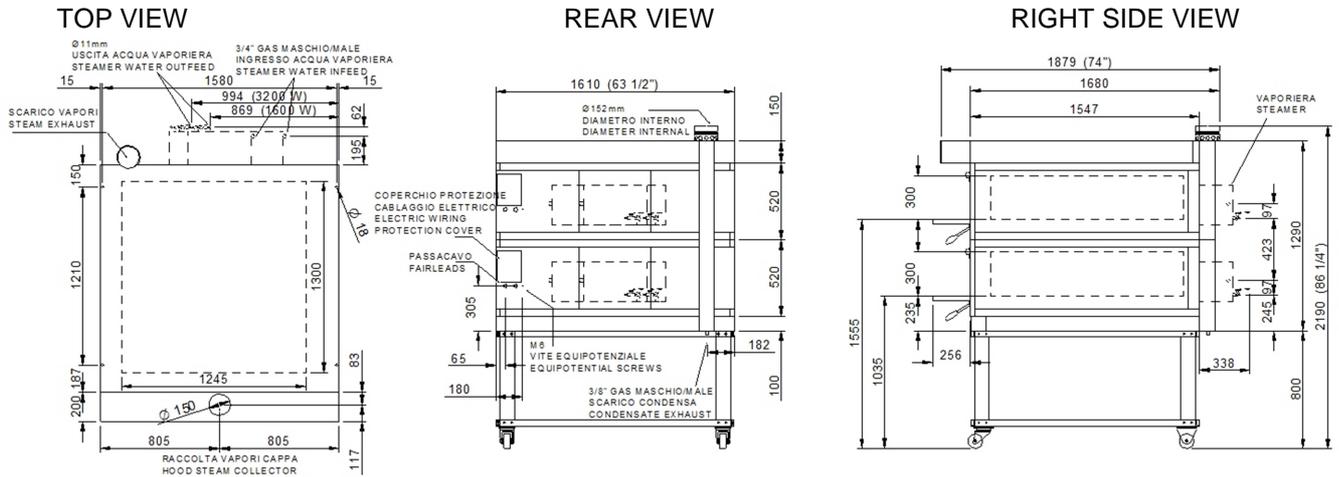

Note: The dimensions indicated in the views are in millimeters.

SPECIFICATIONS

The appliance comprises two independent cooking elements and an optional leavening compartment or support. The oven cooking surface is in buckle plate that provides perfectly even heat distribution over the whole surface, making this oven particular suitable to cook bakery. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C (150°F), whereas the maximum temperature of the baking chamber is 450°C (840°F).

All the data provided below refer to the configuration with 2 baking chambers

DIMENSIONS

External height	2190mm (86 1/4")
External depth	1879mm (74")
External width	1610mm (63 1/2")
Weight	621kg (1370lb)
Baking surface	3,2m ² (34,44ft ²)

SHIPPING INFORMATION

Packed in wooden crate	
Height	1540mm (61")
Depth	2052mm (81")
Width	1810mm (72")
Weight	(681)kg (1502)lb

FEEDING AND POWER

<i>Standard feeding</i>	
A.C. V240 3ph	
<i>Feeding on request</i>	
A.C. V208 3ph	
Frequency	60Hz
Max power	25kW
*Average power cons	12,5kWh
Ampère Max	
60,2A (V240 3ph)	
69,4A (V208 3ph)	
Connecting cable for each chamber	(6AWG)
Power supply (optional prover)	
A.C. V(208/240) 1ph 60 Hz	
Max power	1,8kW
*Average power cons	0,9kWh
Conn. Cable (14AWG)	

TOTAL BAKING CAPACITY

	When combined with leavening compartment or support:
Tray (600x400)mm	12
Tray 26"x18"	8
Max height	2340mm (93")
Max weight	(803)kg (1771)lb

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice